
Level & Go Repair Mastic

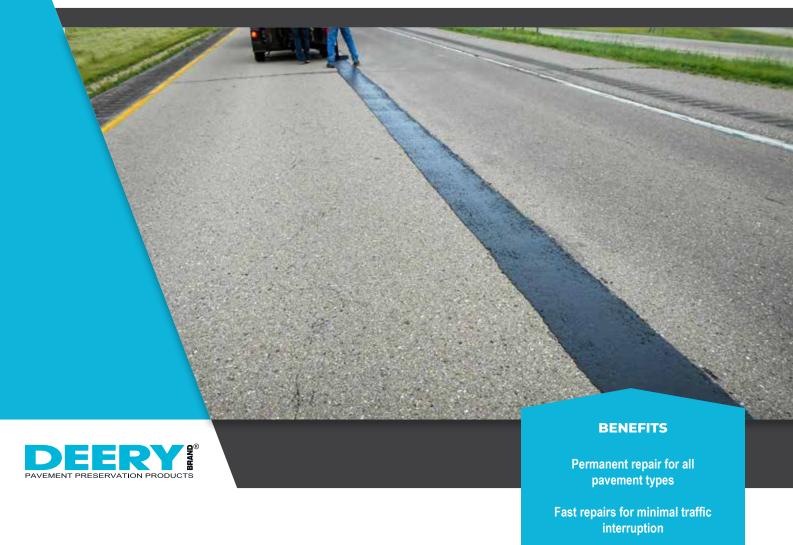

The ideal solution for durable repairs to wide cracks and other distresses.

Level & Go is a hot-applied mix of polymer-modified asphalt binder and select aggregate, used for fixing a variety of wide cracks and distresses in pavement. Level & Go provides a durable, load-bearing, waterproof repair that stays flexible so it won't break apart the surrounding pavement. Available in different mix designs to match your climate and traffic conditions, Level & Go requires no field mixing or additives but will accept bulking stone for deep repairs. Best of all, Level & Go is ready for traffic as soon as it cools, minimizing lane closures.

Durable and load-bearing

Stays flexible to move with thermal expansion/contraction





Ensure a smooth ride for vehicles

RECOMMENDED USES

Repairing Longitudinal Joint Failures

Leveling Depressed Thermal Cracks

Filling Wide Cracks and Joints

Pretreatment Prior to Surface Treatment

Filling Potholes

Sealing Utility Cuts

Skin Patch Repairs

Leveling Manhole Covers

Leveling Bridge Deck Approaches

Filling Spalls, Popouts, & Corner Breaks



FEATURES AND BENEFITS

- Meets ASTM D8260 Type I, the industry standard for hot-applied, aggregate-filled, polymer-modified mastic used to repair distresses in asphalt and Portland Cement Concrete pavements
- Highly adhesive and flexible to remain sealed in place
- Durable adhesion and strength with polymers and special aggregate to withstand traffic and weather for 5+ years
- Eliminates infiltration of water and debris to prevent further deterioration
- No field blending; Engineered in pre-measured package for better consistency and performance, with reduced labor and error
- · Easy, fast installation, with no compaction needed
- Reduces labor, equipment and traffic disruption

Pair Level & Go with the Crafco Patcher II, Patcher 4 or EZ Patcher for quick melting, easy application, and a reliable repair that lasts.

DEERY

©July 2024 Crafco, Inc.